


6-Bolt Pocketbook Come Along Grip

For the pulling of wire up to an initial sag tension. **Grips are custom-milled to your conductor diameter.** Self-contained unit has no loose parts. Clamp down bolts are peened so when opened for installation, flange nuts will not be lost. Our grips are modeled from industry standard. Made in Pittsfield, New Hampshire. Most orders shipped in 1-3 days.

Key Features:

- Trivalent zinc chromate finish on bail for rust inhibition
- High-strength steel rod ends
- Extruded aluminum body
- Conductor diameter & torque for rod ends engraved on body

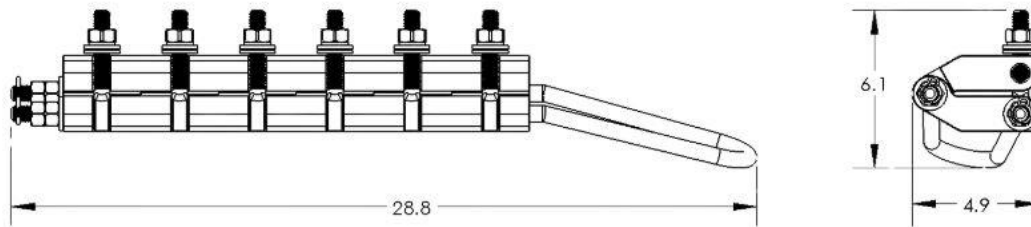

Tool Specs:

MAXIMUM TENSION RATING: 50% of the rated strength of the conductor or 12,000 lbs, whichever is smaller.

Size Range: .415" – 1.250" diameter

Final Torque: 60 ft-lb

Length: 28.8" overall

Weight: 26 lbs.

Bolt size: 5/8" steel

Bail: 5/8" steel



MRP Manufacturing, LLC

Made in USA

23 Catamount Rd, PO Box 5; Pittsfield, NH 03263

mrpmanufacturing.com

Ph: 603-435-5337