

9-Bolt Pocketbook Come Along Grip


For the pulling of wire up to an initial sag tension. **Grips are custom-milled to your conductor diameter.** Self-contained unit has no loose parts. Clamp down rod-ends are peened so when opened for installation, flange nuts will not be lost. Our grips designed in house and tested to meet industry standards. Made in Pittsfield, New Hampshire. Most orders shipped in 2-4 days.

Key Features:

- Trivalent zinc chromate finish on bail for rust inhibition
- High-strength steel rod ends
- Extruded aluminum body
- Conductor diameter & torque for rod ends engraved on body

We've redesigned this tool!

- 13lbs lighter
- Same rating and specs as always

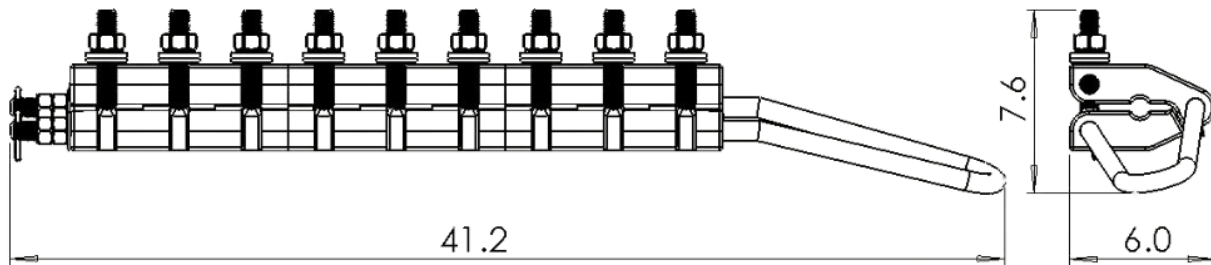

Tool Specs:

MAXIMUM TENSION LIMIT: 50% of maximum rated strength of conductor or 20,000 lbs, whichever is smaller.

Size Range: .875" – 2.50" diameter

Final torque: 75 ft-lb

Length: 41.2" overall

Weight: 55 lbs

Bolt size: 3/4" steel

Bail: 3/4" steel



A product of MRP Manufacturing, LLC

Made in USA

www.mrpmanufacturing.com

Ph: 603-435-5337